


MECHANICAL DOCKLEVELERS

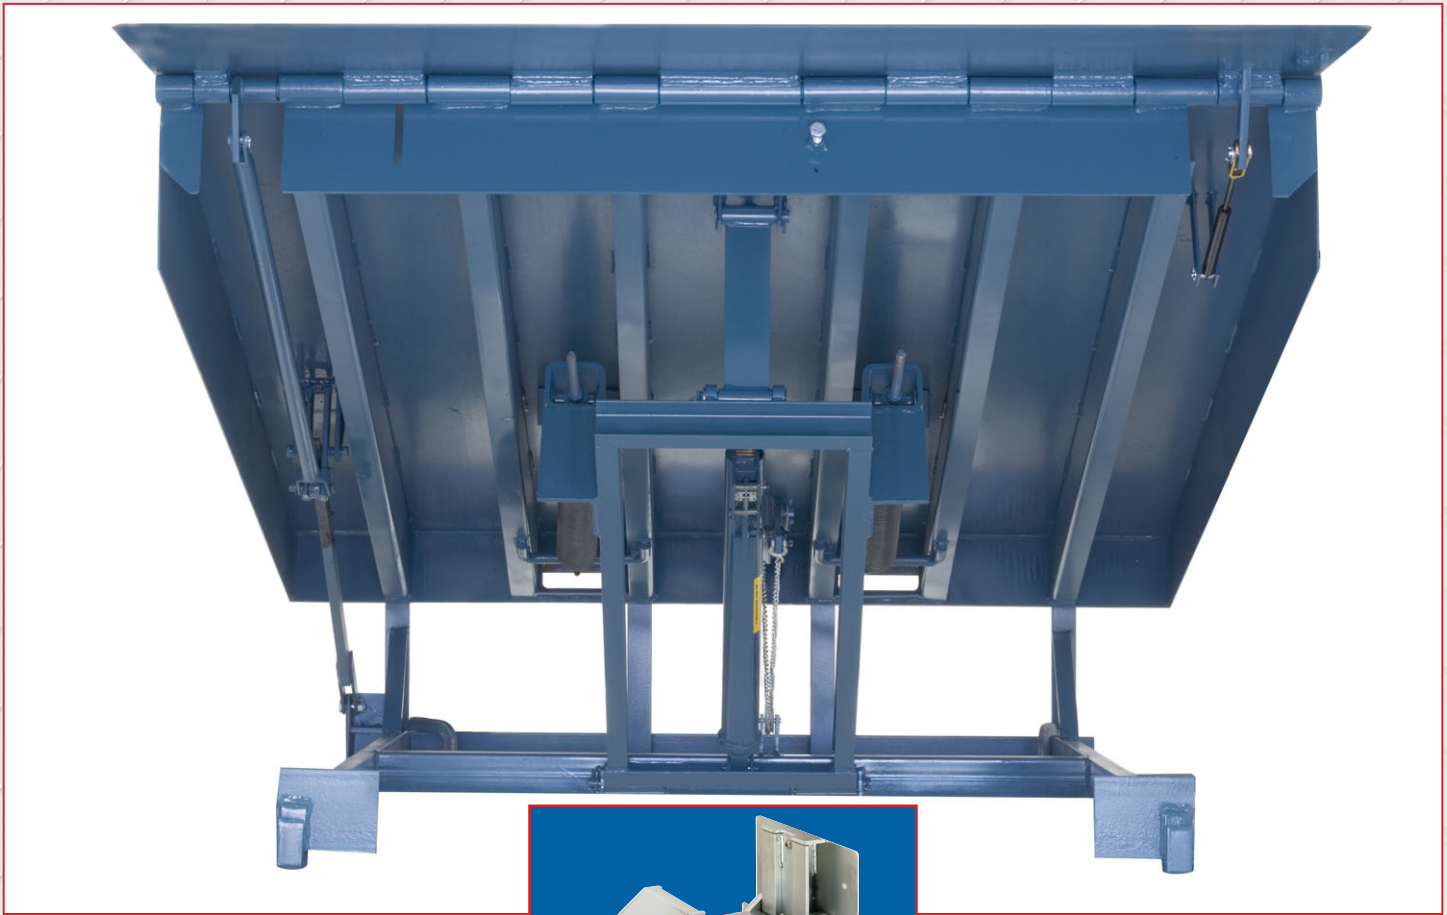

Available TRUCK-LOCK® Safety Systems

FEATURE SUMMARY

- Smooth & Easy Walkout Lip Extension
- Center Position Holdown Eliminates Deck Twist for Level Storage
- Minimum Five Rear Solid Steel Frame Supports
- Black & Yellow Stripes on Side Skirts
- Full Width Rear Hinge Rod
- Working Range Welded Side Guards
- Fixed Rear Hinge Eliminates Pinch, Trip or Impact Point
- Dual Side 33% Beam to Deck Weld Pattern
- Heavy-Duty Spring Counter Balance System
- Lip & Deck Constructed From Minimum 50,000 PSI-Yield Safety Tread Plate
- Open Frame Design for Easy Pit Cleaning
- Dual Pawl Holdown System Reduces Upward Deck Movement During Storage
- Integral Maintenance Support
- Security Night Lock
- Two Dock Bumpers Included

Dedicated People ~ Superior Products

SPECIFICATIONS

MECHANICAL DOCKLEVELERS

DESCRIPTION

The CONSTRUCTOR™ Series of mechanical dock levelers improve productivity with strength, convenience and reliability.

Equipped with the industries most reliable holdown and all the standard features you need for your busy loading dock. The ergonomic walkout lip extension, minimal parts and adjustments make for the most effective and affordable mechanical dock leveler available.

Offered in capacity ratings from 25,000 to 45,000 lbs. in increments of 5,000 lbs. and standard nominal sizes of 6 & 7 feet wide x 6 & 8 feet long.

Standard features include welded structural side guards, night security locks, integral maintenance support, safety black & yellow side skirt labels, and two heavy-duty dock bumpers.

OPERATION

The operator releases the holdown at the rear of the platform until the deck is raised and stopped. The operator walks the platform down extending the lip onto the truck bed. The deck will float up and down and cant side to side with the truck during loading. The standard 16" long lip will extend out and engage a truck bed 12" above and below floor level.


CONSTRUCTION

Unitized platform structure with 33% dual side beam to deck weld pattern and continuous welds at the header plate and hinge tubes for superior strength.

The deck plate, lip plate and beam sections are constructed of minimum 50–55,000 PSI yield material. The fixed rear hinge provides 4" of side-to-side tilt with no pinch point. The frame has a minimum of five solid steel rear supports, five hinge connections and a full width rear hinge rod.

The open design frame provides for simple pit cleaning and the security lock system prevents illegal entry when the door is closed.

The front and rear hinge rods are constructed of SAE 1045 superior shaft and are factory coated with anti-seize lubricant.

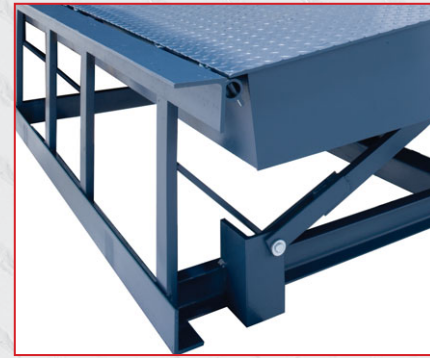

Fixed Rear Hinge With Solid Steel Supports
and Full Width Rod

WARRANTY

Nordock guarantees that the CONSTRUCTOR™ series of Mechanical Docklevelers will perform as described and to the full satisfaction of the purchaser for one-year from date of receipt.

Consult your Nordock representative for assistance in choosing the correct capacity and options for your application.

OPTIONS

- 18" or 20" Long Lip
 - Zinc Plated Hinge Rods
 - Grease Fittings on Front Hinge
 - Full Range Telescoping Side Guards
 - Center Deck Reinforcement*
- *Required when three wheel forklifts are used.

ACCESSORIES


- TRUCK-LOCK® Vehicle Restraint Systems
- FALL-STOP™ Safety Barrier Gates
- Brush Weather Seals
- Self Forming Pour in Pans
- Steel Spring & Steel Faced Dock Bumpers
- Dock Lights

MODELS & NOMINAL DIMENSIONS

Model*	Width	Length
CM-66	6'0"	6'0"
CM-68	6'0"	8'0"
CM-76	7'0"	6'0"
CM-78	7'0"	8'0"

*Add capacity required from 25,000 to 45,000 lbs. Example: CM-68-35.

MECHANICAL DOCKLEVELERS

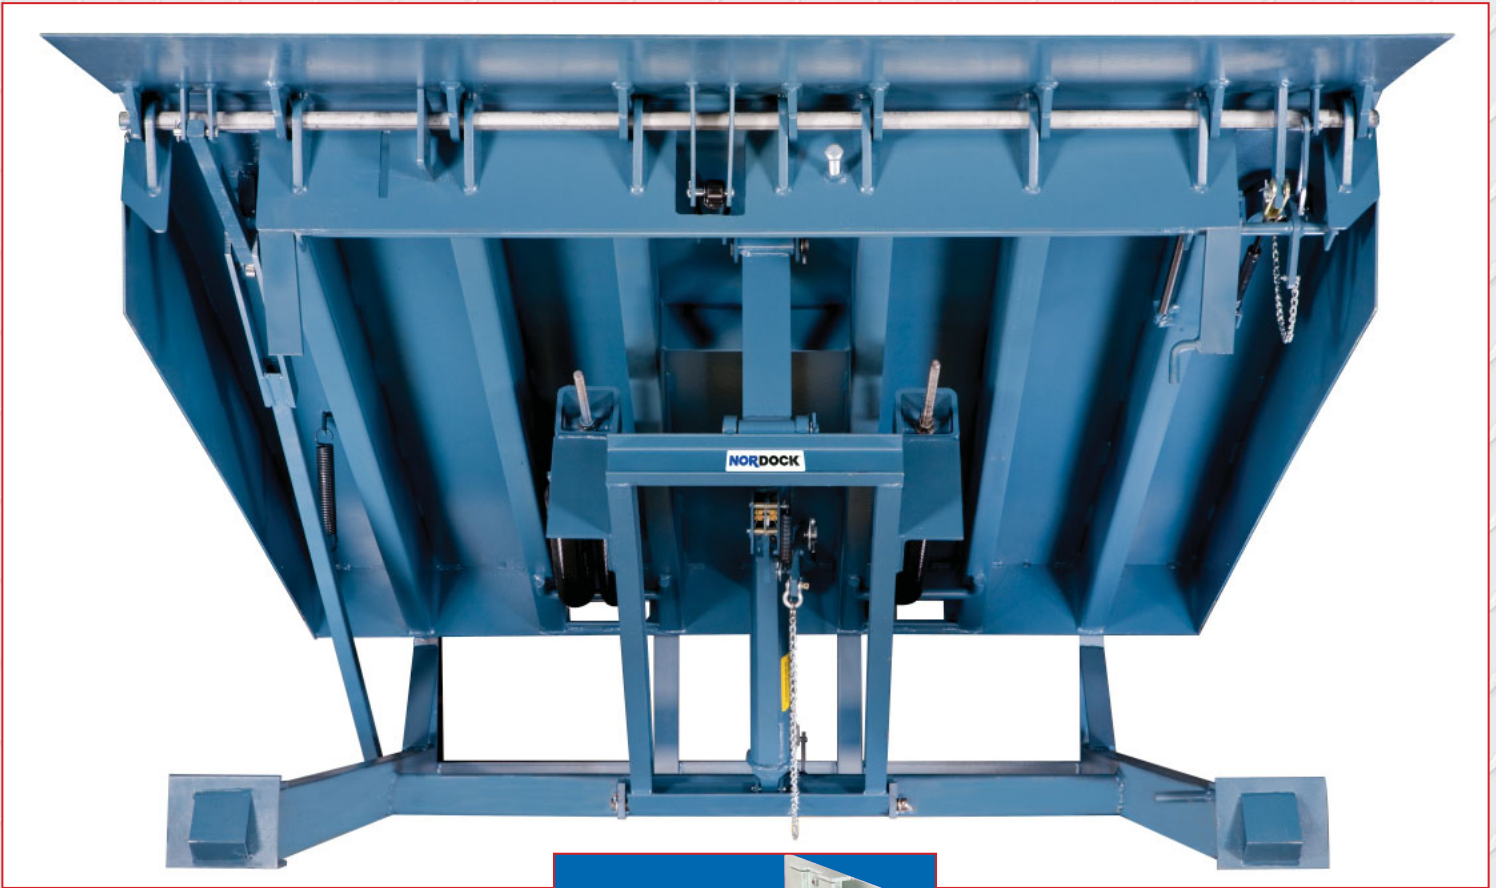

FULL WIDTH REAR HINGE
WITH ZINC PLATED ROD



AVAILABLE TRUCK-LOCK®
SAFETY SYSTEMS



EXCLUSIVE LIP LUG &
HEADER PLATE DESIGN

FEATURE SUMMARY

- Twenty-Year Front & Rear Hinge Warranties
- Exclusive Self Cleaning Lip Lug & Header Plate Design
- Easy Transfer Full Width Fixed Rear Hinge With No Pinch Point
- Smooth & Easy Activation With Walk Down Yieldable Lip Extension
- 33% Deck to Beam Weld Pattern Provides Superior Strength
- Center Position Holdown Ensures Level Deck Storage
- Open Frame Design For Easy Pit Cleaning
- Retracting Solid Steel Deck Legs With Below Dock End Load Control
- Zinc Coated Full Width Front & Rear Hinge Rods
- Integral Separate Maintenance Supports for Deck & Lip
- Working Range Structural Welded Side Guards
- Additional Center Beam Deck Support For 3 Wheel Lift Trucks
- Stored Position Lock for Increased Security

Dedicated People ~ Superior Products

SPECIFICATIONS

MECHANICAL DOCKLEVELERS

DESCRIPTION

The INDUSTRIAL™ Series mechanical docklevelers are the ultimate in strength, ease of use and reliability. Equipped with an exclusive lip lug and header plate design, easy release holdown with dual pawls and full yielding walkout lip extension for a smooth and efficient operation.

Available in capacity ratings from 25,000 to 50,000 lbs. in 5,000 lb. increments and standard nominal sizes of 6 feet wide x 6 feet long to 7 feet wide x 10 feet long. Standard features include working range side guards, retractable deck stop legs, security night lock and a comprehensive warranty.

OPERATION

The operator releases the holdown at the rear of the platform until the deck is raised and stopped. The operator walks the platform down extending the lip onto the truck bed. The deck will float up and down with the truck during loading. The standard 16" long lip will extend out and engage a truck bed 12" above and below floor level.

CONSTRUCTION

The platform is a unitized welded structure with 33% deck to beam weld pattern, and continuous welds at the beam, header plate and lug connections for maximum strength. The deck plate, lip plate, beam sections and lugs are constructed of minimum 50–55,000 PSI yield material.

A standard center deck beam and welded side guards provide additional deck plate support. The continuous rear hinge provides 4" of side-to-side tilt with no pinch point. The frame has six solid steel rear supports, an open design for pit cleaning, and a night lock that prevents illegal entry when the door is closed. The front and rear hinge rods are SAE 1045 material, zinc plated and factory coated with anti-seize lubricant.

OPTIONS & ACCESSORIES

- TRUCK-LOCK® Vehicle Restraint Systems
- FALL-STOP™ Safety Barrier Gates
- 18" or 20" Long Lip
- Brush Weather Seals
- Self Forming Pour in Pans
- Steel Spring & Steel Face Dock Bumpers
- Dock Lights



WARRANTY

Nordock guarantees that the INDUSTRIAL™ Series docklevelers will perform as described and to the full satisfaction of the purchaser for one-year from date of receipt or Nordock will repair, replace or remove the product and refund the purchase price. In addition, the front and rear hinge assemblies are guaranteed, under specified guidelines, for a period of Twenty-Years.

All Nordock docklevelers are designed to exceed ANSI requirements and properly applied comes with a 10-Year structural warranty.

MODELS & NOMINAL DIMENSIONS

Model*	Width	Length
NM-66	6'0"	6'0"
NM-68	6'0"	8'0"
NM-610	6'0"	10'0"
NM-6.56	6'6"	6'0"
NM-6.58	6'6"	8'0"
NM-6.510	6'6"	10'0"
NM-76	7'0"	6'0"
NM-78	7'0"	8'0"
NM-710	7'0"	10'0"

* Add capacity required from 25,000 to 50,000 lbs. Example: NM-66-35.

NORDOCK® INC.

Website: www.nordockinc.com ~ Email: Sales@nordockinc.com ~ Toll Free: 866-885-4276

Nordock Inc. reserves the right to make changes to specifications without notice or obligation. Nordock products are covered by various U.S. and foreign patents or pending applications.