



# FSF STAY OPEN FIRE DOOR

## Advantages

Made in Canada for Canadian conditions

Rugged 2" curved slats

G90 Galvanized finish that needs no further painting

Structural Angle Guides and Bottom Bar are prime painted

Fluid governor for smooth and quiet operation

Steel Plate Brackets are more durable than stamped steel bracket plates

An economical alternative when a fire door is required to close only during testing or in the event of a fire

Resetting is simple and can be performed by one technician

## Features

2C curved Slat Curtain, 22 ga.

¼" Thick Steel Bracket Plates

Cast Iron Stops

1 Year Warranty

¾, 1 ½, 3, or 4 hour fire labeled

## Options

Prime painted hood

Optional solenoid release with 30 sec. time delay or 72HR battery backup

Smoke Detectors & sound strobes

Smoke seals

## Benefits

Ease of installation and resetting



Ensures years of trouble free operation

Best value for the price





# STAY OPEN FIRE DOOR DETAILS



## TYPICAL DETAILS



## GUIDE DETAILS

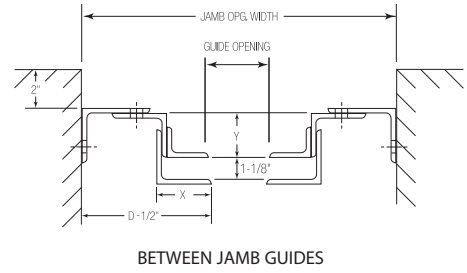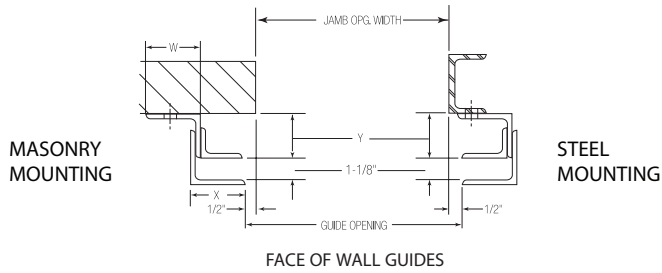

## AREA CHART

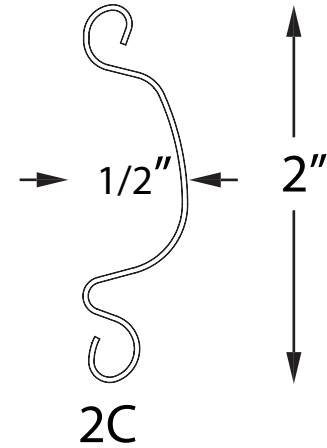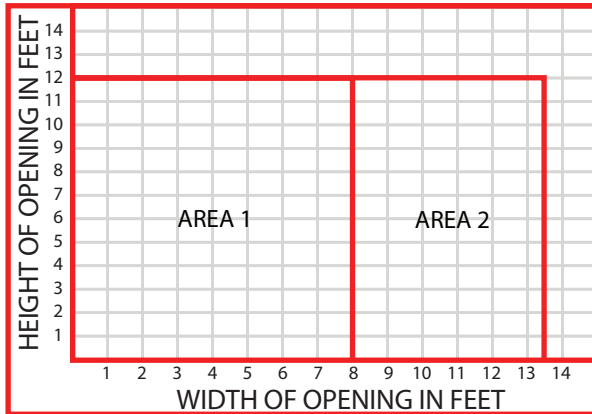

## DOOR CLEARANCE CHART

Area	Slat	Dimensions in Inches					
		A	B	D	W	X	Y
1	2C	13"	14"	6"	2 1/2"	2 1/2"	2 1/2"
2	2C	13"	14"	6"	2 1/2"	3"	2 1/2"

Available in sizes up to 13' 6" wide x 12' 0" high  
Contact us for oversize doors



# SERVICE FIRE DOOR

## Advantages

Made in Canada for Canadian conditions.

Rugged 2" curved or flat slats.

G90 galvanized curtain and hood that does not require further painting.

Structural angle guides and bottom bar are prime painted.

Fluid governor for smooth and quiet operation.

Steel plate brackets are more durable than stamped steel bracket plates.

Resetting is simple and can be performed by a single technician.

## Features

2C curved or 2F flat slat curtain, 22ga. steel.

G90 galvanized finish.

1/4" thick steel bracket plates.

2 spring system.

1 year warranty.

3/4, 1 1/2 and 3 hour label (for installation in concrete, masonry, structural steel or gypsum board walls).

4 hour label available (for masonry applications).

Oversized labels available.

## Options

Push up, chain hoist, crank, or motor operation.

Solenoid release with 30 sec time delay or 72hr battery back-up.

Smoke detectors & sounder strobes.

Smoke gaskets.

## Benefits

Ease of installation and resetting.


Ensures years of trouble free operation.

Best value for the price.




# SERVICE FIRE DOOR DETAILS


## TYPICAL DETAILS



ELEVATION




FCF CHAIN



FMF GEARHEAD VERTICAL MOTOR


## GUIDE DETAILS

MASONRY MOUNTING

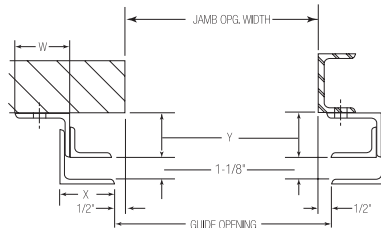



FACE OF WALL GUIDES

STEEL MOUNTING

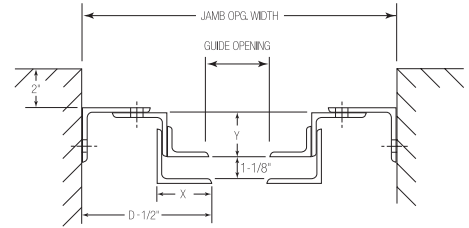

BETWEEN JAMB GUIDES

## AREA CHART

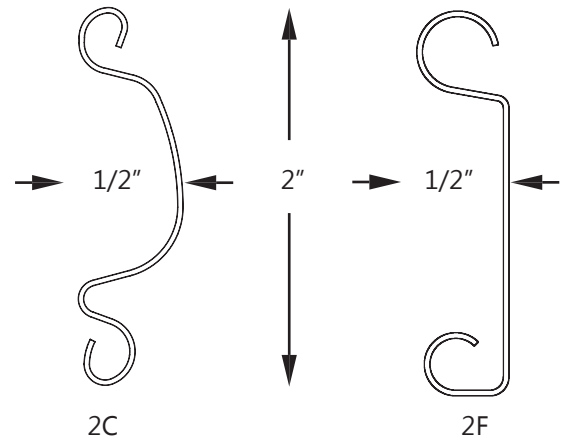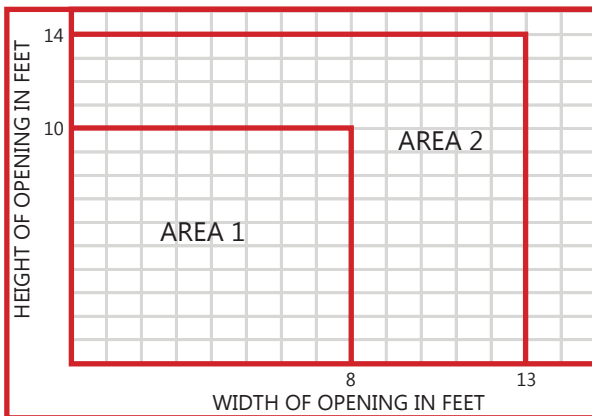

## DOOR CLEARANCE CHART

AREA	SLAT	A	B	D	W	X	Y
1	2C/2F	13"	14"	9"	2 1/2"	2 1/2"	2 1/2"
2	2C/2F	15"	16"	9"	3"	3"	2 1/2"

2C & 2F Slats are available in sizes up to 13'-6" wide x 12'-0" high.  
Contact us for larger doors.